


CONDITION FOR WALL BRACING

WALL TOP PLATE CONNECTION

SCALE: 1 1/2" = 1'-0"


2

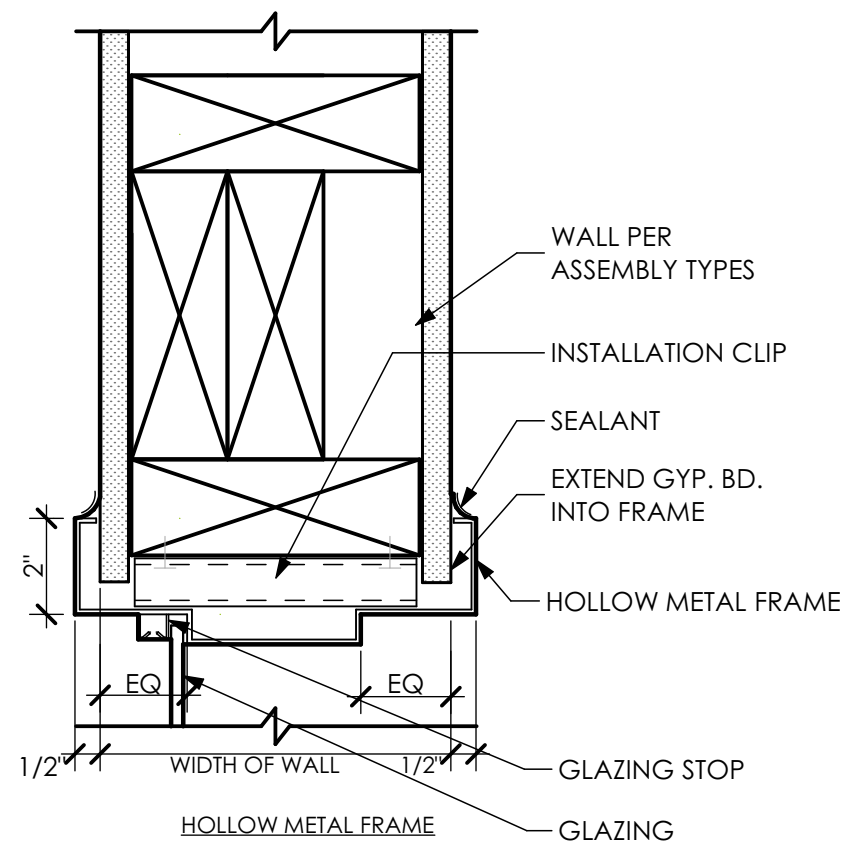

H.M. BORROWED LITE HEAD/JAMB/SILL

SCALE: 3" = 1'-0"


3

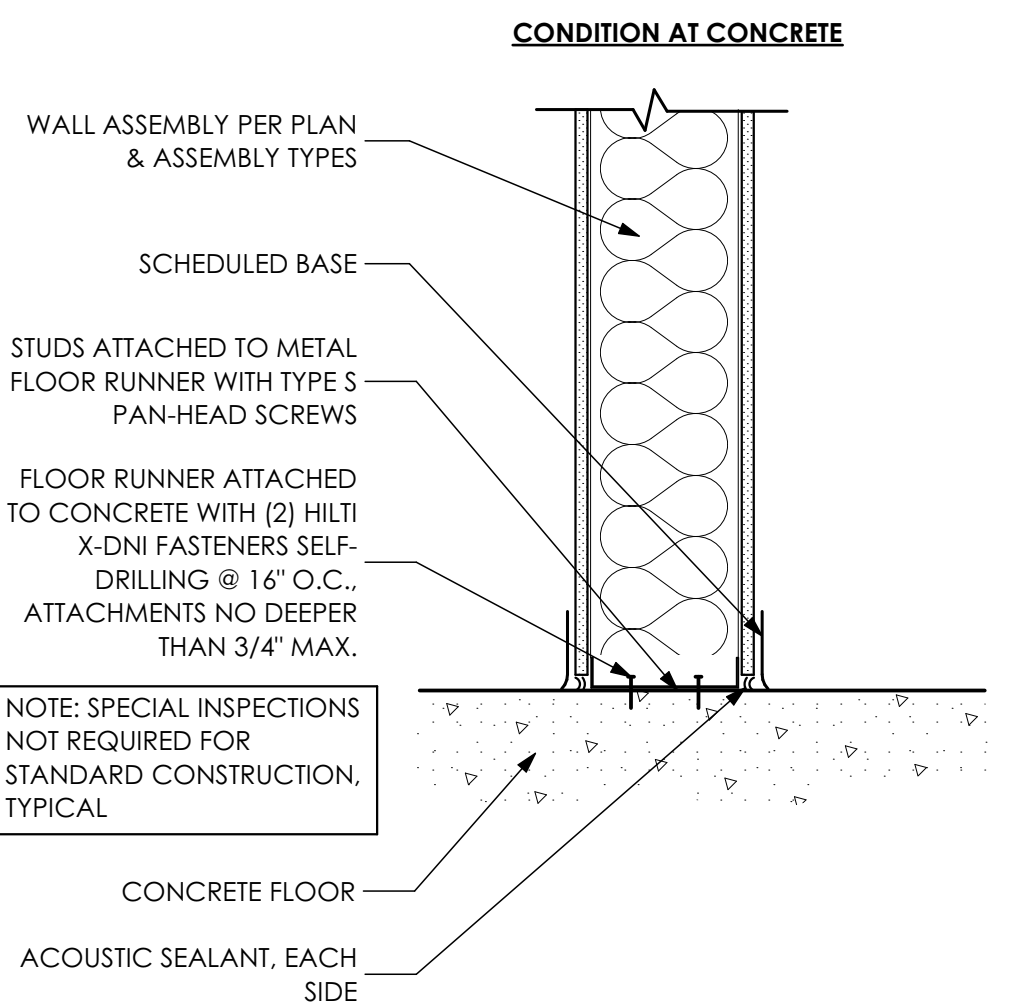

WALL BASE PLATE CONNECTIONS

SCALE: 1 1/2" = 1'-0"

4

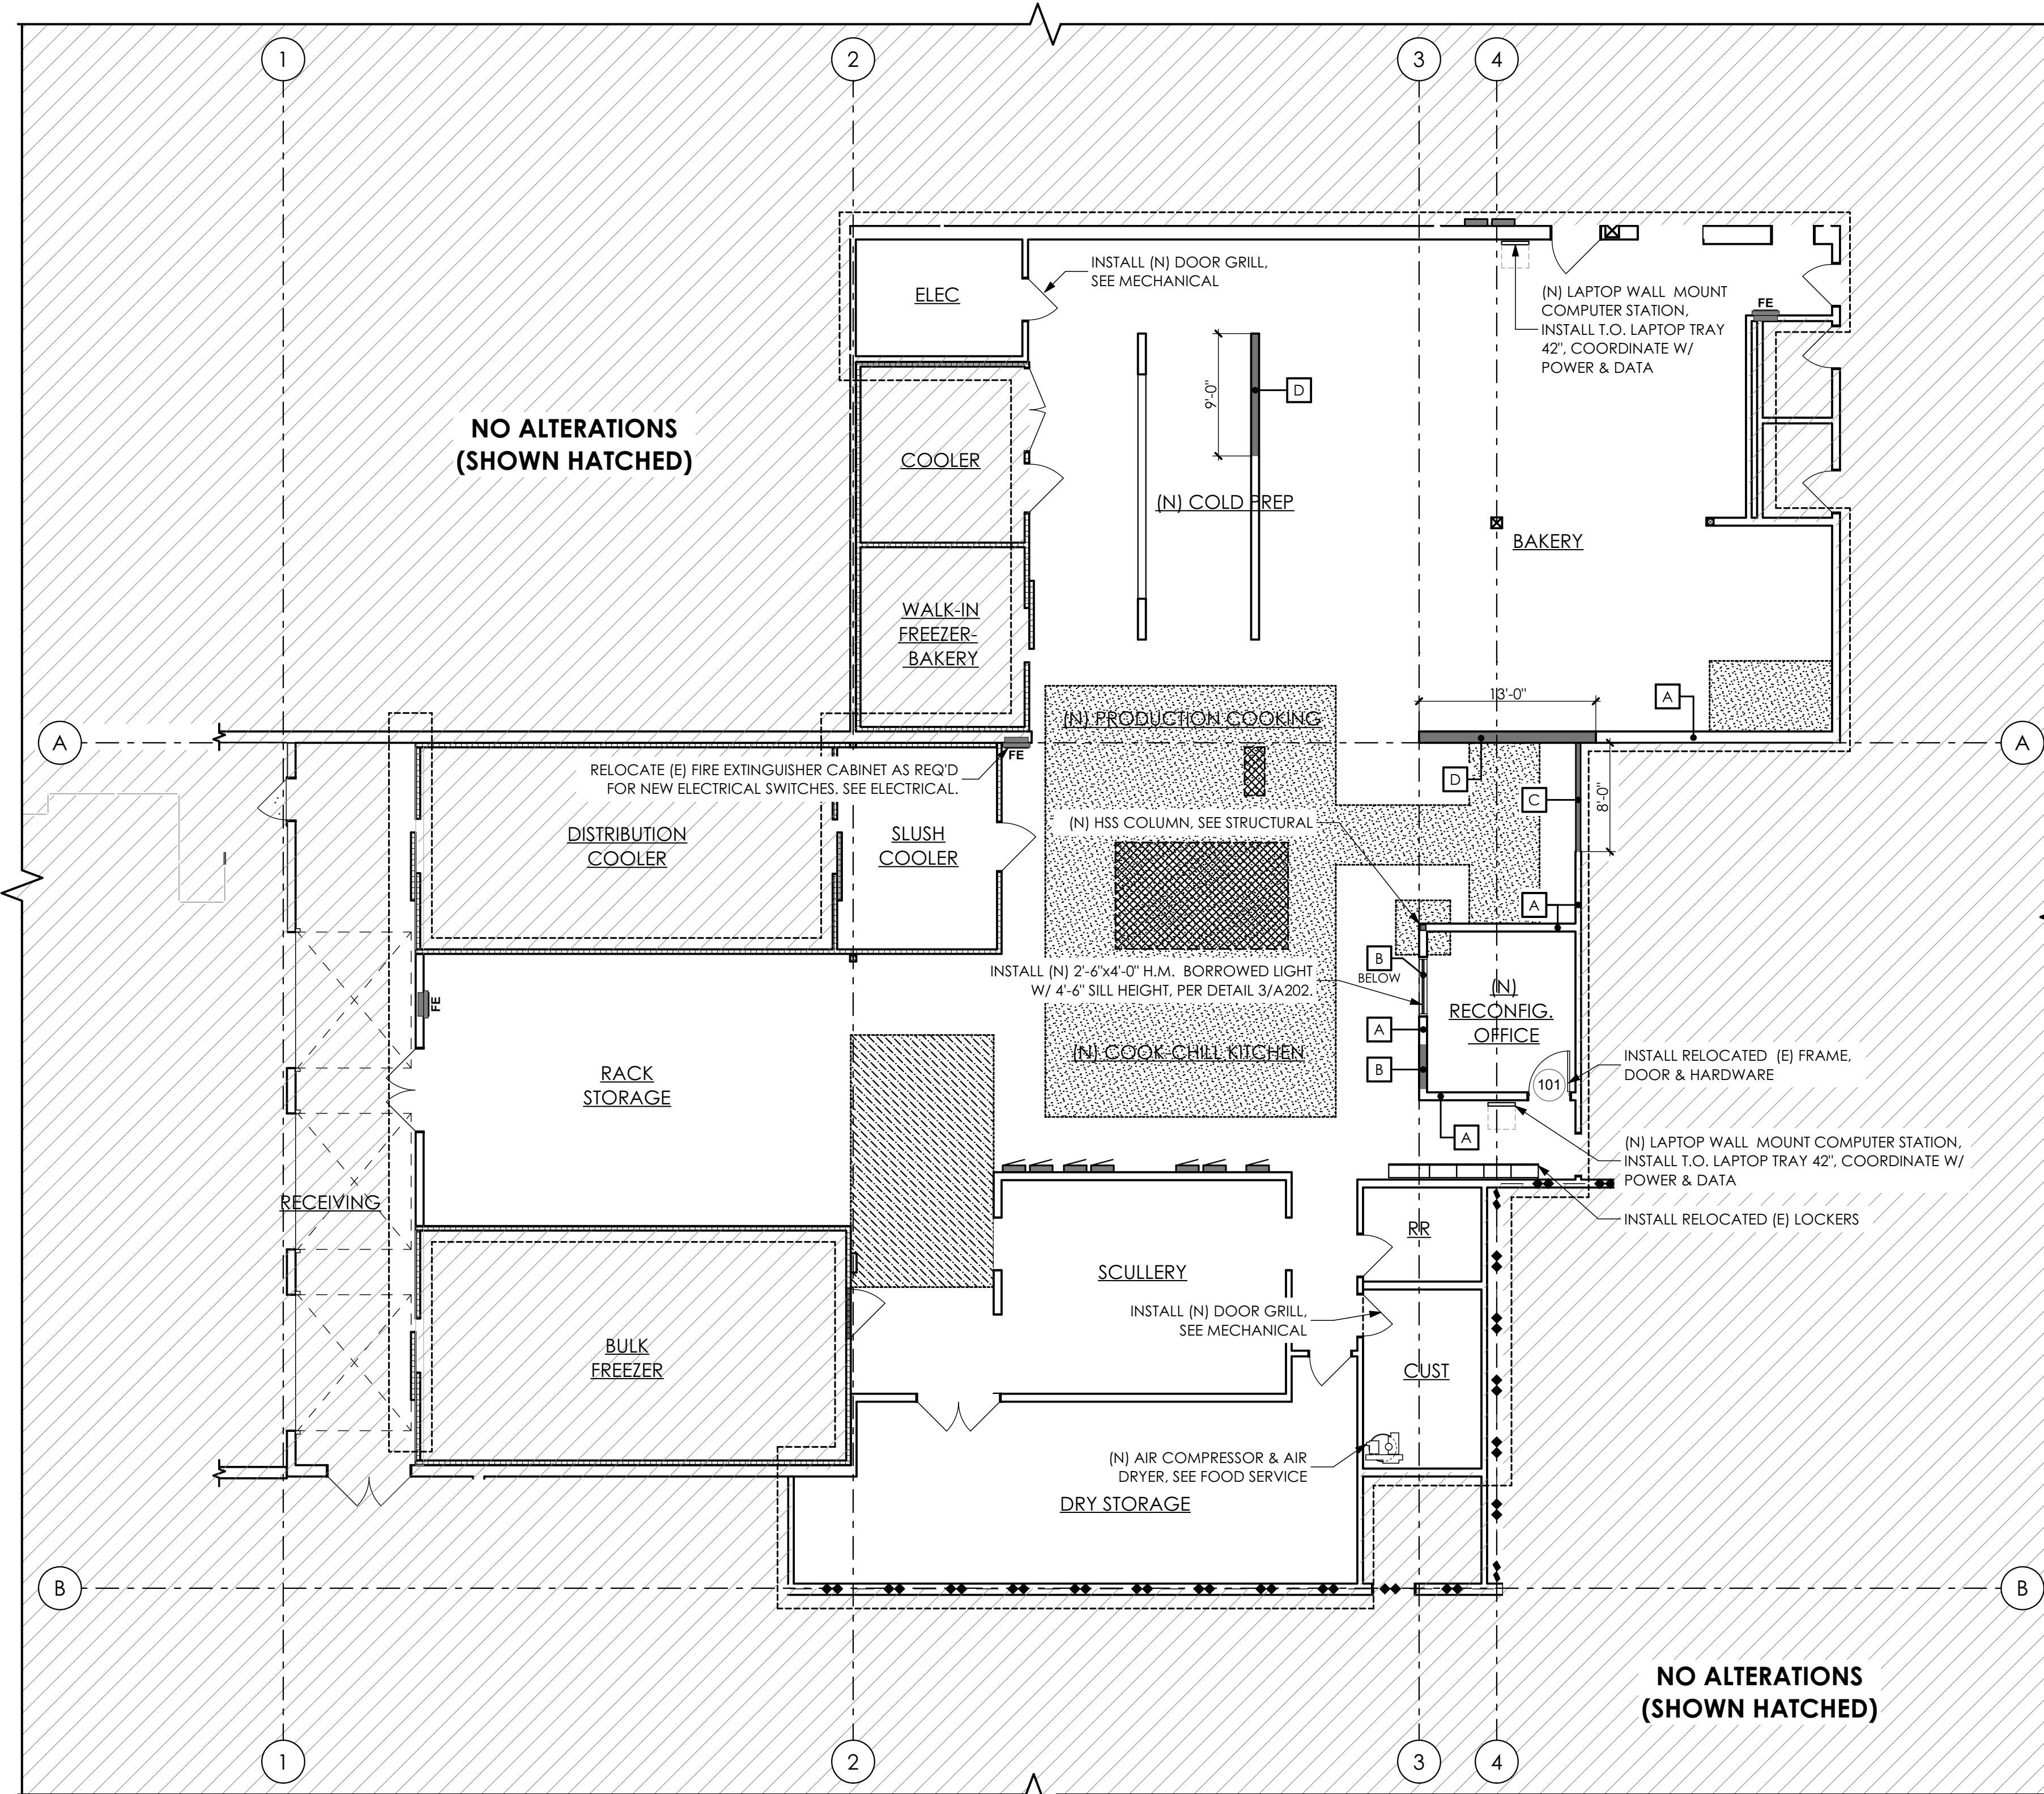


NO ALTERATIONS (SHOWN HATCHED)

FLOOR PLAN

SCALE: 1/8" = 1'-0"

1

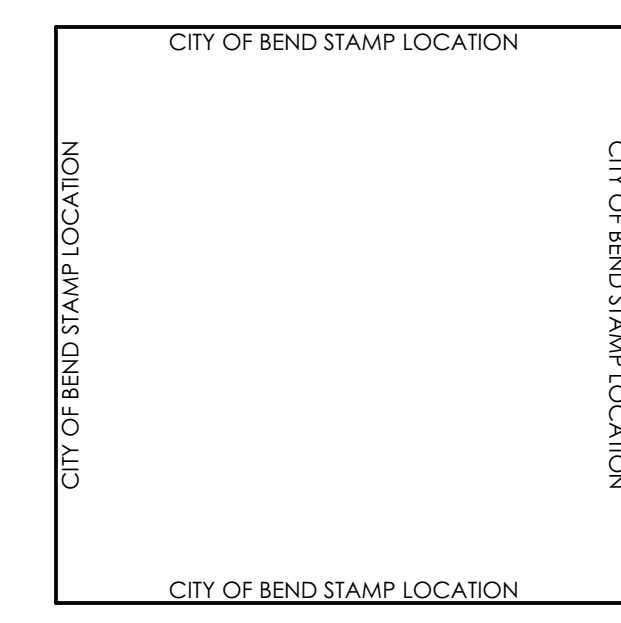

PLAN GENERAL NOTES

- A. DRAWINGS ARE SHOWN TO SCALE AS NOTED AS AIDS IN DETERMINING SIZE AND PROPORTION. ONLY WRITTEN DESCRIPTIONS AND SIZES SHALL BE UTILIZED FOR CONSTRUCTION. DRAWINGS SHALL NOT BE SCALED.
- B. UNLESS NOTED OTHERWISE, DIMENSIONS ON PLANS ARE:
  - FACE OF STUD (F.O.S.)
  - FACE OF CONCRETE (F.O.C.)
  - CENTERLINE OF DOOR AND WINDOW OPENINGS
- C. FIXTURES AND EQUIPMENT SHOWN ARE FOR COORDINATION PURPOSES ONLY. REFER TO THE MANUFACTURER'S PRODUCT DATA, ENGINEERING DRAWINGS, AND SPECIFICATIONS FOR FIXTURE AND EQUIPMENT DESCRIPTIONS AND LOCATIONS.
- D. PRESERVATION OF ADJACENT OR EXISTING CONSTRUCTION:
  - AVOID DAMAGE TO EXISTING STRUCTURES, SIDEWALKS, CURBS, PAVING AND LANDSCAPING.
  - PATCH, REPAIR OR REPLACE ANY ITEMS DAMAGED, OR AS DIRECTED BY THE PROPERTY OWNER.
- E. AVOID UNNECESSARY DISRUPTIONS TO THE FUNCTIONS AND ACTIVITIES OF ADJACENT BUILDINGS.
- F. CAREFULLY REVIEW ALL CONTRACT DOCUMENTS PRIOR TO CONSTRUCTION. BRING DISCREPANCIES OR CONFLICTING DATA TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WORK.
- G. UNLESS NOTED OTHERWISE, INSTALL DOORS WITH 4" FROM HINGE SIDE OF DOOR TO ADJACENT WALL FRAMING.
- H. CONTRACTOR TO VERIFY SIZES OF ROUGH DOOR AND WINDOW OPENINGS PRIOR TO ORDERING DOORS AND WINDOWS.

FLOOR PLAN LEGEND

- FE (E) 5 LB A:B:C FIRE EXTINGUISHER IN SEMI RECESSED CABINET
- (E) ELECTRICAL PANEL
- APPROXIMATE EXTENTS OF (N) FLOOR SLAB AREA. NOTE: (N) CONCRETE PER STRUCTURAL. INSTALL CONCRETE SEALER AT ALL NEW CONCRETE SLABS.
- APPROXIMATE EXTENTS OF CONCRETE SLAB DEPRESSION. SEE STRUCTURAL & FOOD SERVICE DRAWINGS
- APPROXIMATE EXTENTS OF AREA TO REPAIR, PATCH & GRIND SMOOTH (E) FLOOR CRACKS. INSTALL CONCRETE SEALER.

WALL LEGEND

- ◆--- LINE OF EXISTING 2HR AREA SEPARATION WALL
- OUTLINE OF PROJECT EXTENTS (APPROXIMATE)
- EXISTING DOOR TO REMAIN
- NEW DOOR
- EXISTING WALL TO REMAIN
- EXISTING INSULATED COOLER/FREEZER WALL TO REMAIN
- (E) WALL WITH NEW FINISHES:
  - WALL TAG SIDE: FULL HEIGHT FRP (FIBER REINFORCED PLASTIC).
  - OPPOSITE SIDE: (N) PAINT, AS REQUIRED, TO MATCH EXISTING.
  - NOTE: INSTALL (N) RESILIENT BASE (RB-1) ON OFFICE/CLASSROOM SIDE, STAINLESS STEEL WALL BASE (SB-1) ON KITCHEN SIDE.
- (N) 2X4 WOOD STUD WALL W/ 5/8" TYPE "X" GWB EA SIDE.
  - WALL TAG SIDE: FULL HEIGHT FRP (FIBER REINFORCED PLASTIC).
  - OPPOSITE SIDE: (N) PAINT TO MATCH EXISTING.
  - NOTE: INSTALL (N) RESILIENT BASE (RB-1) ON OFFICE/CLASSROOM SIDE, STAINLESS STEEL WALL BASE (SB-1) ON KITCHEN SIDE.
- (N) 362S1 62-33(33 KSI) @ 16" O.C. METAL STUD WALL W/ 5/8" TYPE "X" GWB EA SIDE. FRAME PER 2 & 4/A202.
  - WALL TAG SIDE: STEEL SHEET PER FOOD SERVICE DRAWINGS.
  - OPPOSITE SIDE: (N) PAINT, AS REQUIRED, TO MATCH EXISTING.
  - NOTE: INSTALL (N) RESILIENT BASE (RB-1) ON OFFICE/CLASSROOM SIDE, STAINLESS STEEL WALL BASE (SB-1) ON KITCHEN SIDE.
- (N) 362S1 62-33(33 KSI) OR 600S125-68 (50 KSI) @ 16" O.C. METAL STUD WALL AS REQ'D. W/ 5/8" TYPE "X" GWB EA SIDE. FRAME PER 2 & 4/A202.
  - WALL TAG SIDE: STEEL SHEET PER FOOD SERVICE DRAWINGS.
  - OPPOSITE SIDE: FULL HEIGHT FRP (FIBER REINFORCED PLASTIC).
  - NOTE: INSTALL (N) STAINLESS STEEL WALL BASE (SB-1) ON BOTH SIDES AND ADJACENT EXISTING WALLS IN KITCHEN.